



YPSO

Tap-off enclosure for Mini-Breakout riser cable

home - **EnLighten**
FTTH Solutions

YPSO is an enclosure to cover the incision in the TE Connectivity Mini-Breakout cable with 12 and 24 fibers. This cable is an individual fiber reinforced cable developed for riser applications in MDU environments. This cable allows to retract specific fibers from the cable at each floor access point. This enclosure is integrally part of the TE Connectivity MDU system solution.

This YPSO device allows tapping off individual fibers from this riser cable and protects the transition into a protective tube that protects the retracted fiber from the riser cable up to the splice extension (SPLX product) or the horizontal duct.

A cable diameter of 8.2 mm is recommended (Mini-Breakout cable 12 and 24F)

Features

- Very compact size: dimension 80mm x 30mm diameter for integration into small sized floor boxes
- Capacity to tap off at least 6 fibers (3left/3right)
- Restores the integrity of the TE Connectivity Mini-Breakout cable after making an incision for fiber access
- Mini-Breakout cable incision of only 55 mm
- Designed for indoor use
- Flame retardant LSZH material
- Front accessible
- Can handle cable diameter of 8.2 mm (Mini-Breakout cable 12 and 24F)

Description

YPSO-M-6

Kit Content

- Base
- Cover
- Cable fixation accessories


MOQ = SPQ = 30pcs

Accessories

- Fiber guiding tubing: TUBE-28-1-300
- Tubing fixation booth:
YPSO-BOOTH-RED-1-(200)
- Splice extension: SPLX-70-A

Compatible with cables

- OC-CB-MINI-BO24-A-1000
- OC-CB-MINI-BO12-A-1000

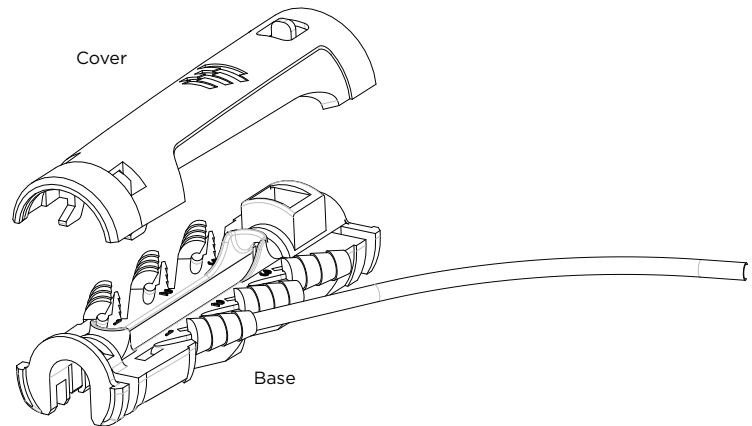

For more technical options and order quantity information, please consult the products ordering guides or your local sales representative.

TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba
Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel 32-16 351 011 (USA)1-919-557-8900
Fax 32-16 351 697 (USA)1-919-557-8498
www.te.com
www.telecomnetworks.com
TC 1057/DS/3 09/11

