



## XCSM


High performance thick wall heat-shrinkable tubing

- High recovery ratio reducing the number of sizes and inventory costs
- UV stabilised material suitable for aerial and underground applications
- Used where maximum reliability is required, submersible, direct buried installations
- Internally coated with hotmelt adhesive or mastic both giving high corrosion and mechanical performance
- Available in 5 standard lengths

# XCSM

High performance thick wall heat-shrinkable tubing

## Sizing/ordering information

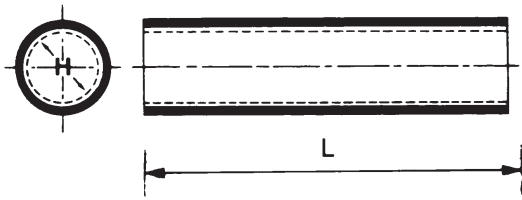

Description	H a (mm)	H b (mm)
XCSM 23/6	23	6
XCSM 30/8	30	8
XCSM 44/12	44	12
XCSM 55/18	55	18
XCSM 85/22	85	22


H a: as supplied

H b: after unrestricted recovery

Standard lengths: 250, 500, 750, 1000, 1500

## Ordering example

**XCSM-85/22-1500/S(Sxx)**

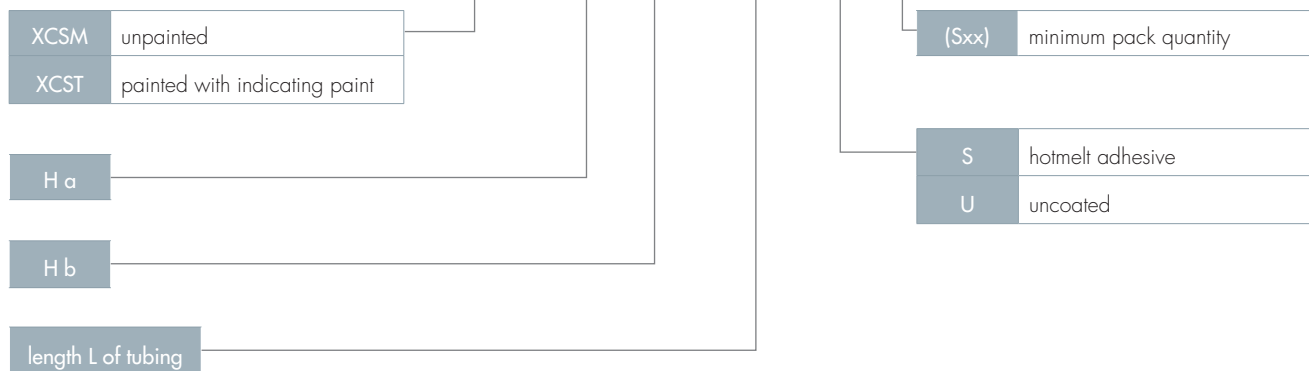

[www.commscope.com](http://www.commscope.com)

Visit our website or contact your local CommScope representative for more information.

© 2016 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope, Inc. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services.

PS-322649-EU (01/16) previously TC 049/DS/10 03/13