

## Profile Rod Frames



### Features and benefits

- Profile frame consists of 2 stainless steel profile rods, each 12 mm in diameter and profile holders 46 mm in depth
- Profile rod frame with 95 mm distance between rods accommodates:
  - Series 2, 10-pair LSA PROFIL modules
  - Series 2, 8-pair LSA PROFIL modules
  - NT, 10-pair LSA PROFIL modules
  - HighBand® modules
  - HD 180 modules
- Profile rod frame with 75 mm distance between rods accommodates:
  - Series 2, 8-pair LSA PROFIL modules
  - NT, 8-pair LSA PROFIL modules
  - Series 10 LSA PROFIL modules

Description	HD 180	Series 2	Length of rods (mm)	Number of profile rod holders included	Order No.
Profile rod frame with 95 mm distance between rods. Number of modules accommodated	20	12	299	2	65772812-01
	40	24	574	2	65772812-02
	60	36	861	3	65772812-03
	80	48	1136	3	65772812-04
	100	60	1423	4	65772812-05
	120	72	1698	4	65772812-06

## Individual Profile Rods and Rod Holders



### Features and benefits

- Individual rods and rod holders may be ordered to construct a custom, modular frame
- Rod holders with a depth of 86 mm are available: deeper profile frames are used when cable support elements and cable guides are used
- All profile holders accept 12 mm diameter profile rods
- One profile holder should be placed for each 500 mm of profile rod

Description	Number of profile rod holders included	Order No.
<b>Profile rod holder</b>		
Installation depth: 46 mm		
Rod distance: 95 mm		65772834-00
Rod distance: 75 mm		65772834-01
Installation depth: 86 mm		
Rod distance: 95 mm		65772860-00
Installation depth: 190 mm		
Installation depth: 140 mm		
Rod distance: 95 mm		65772868-00
<b>Profile rod</b>		
Diameter: 12 mm steel, unthreaded ends		
Maximum number of Series 2 modules		
12	299	65773835-01
18	447	65773835-25
24	574	65773835-02
33	750	65773835-16
48	1136	65773835-04
55	1260	65773835-08
60	1423	65773835-05
72	1698	65773835-06
76	1800	65773835-07
88	2000	65773835-14
100	2450	65773835-21

### Profile Rod Installation Accessories



60362121-00 Jumper guide



66192026-00 Earthing clamp



66192023-00/66192030-00/66192018-00




60893202-00 Earthing contact clip



66192046-xx **Spacer**



64612013-00 **DIN Rail adapter**

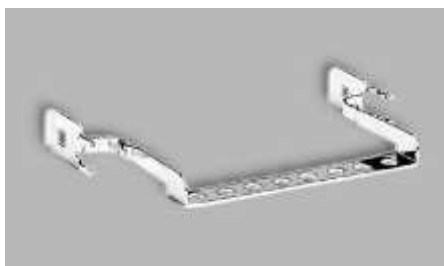

66192040-00 **Cable support bracket**

Description	Dimensions (H x W x D)	Order No.
<b>Jumper hooks</b> Snap onto bar bracket Distance between hooks: 120 mm Quantity: 4	Depth: 93 mm	66192031-00
<b>Jumper guide</b> Snaps onto profile rod Recommended spacing between frames: >60 mm S-Quantity: 2	10 mm x 45 mm	66192016-00
<b>End unit</b> Snaps on to top or bottom of profile rod installation of 10-pair modules. Also allows installation of a dust cover (requires 2 end units)		
63 mm deep, with spring clip Recommended for use with dust cover Quantity: 2		66192023-00
41 mm deep, with spring clip Recommended for use with dust cover Quantity: 2		66192030-00
41 mm deep, without spring clip Quantity: 1		66192018-00
<b>Spacer</b> Used to create uniform spacing in profile rod installations		
	Height: 2.5 mm	66192046-00
	Height: 5 mm	66192046-01
<b>Cable support bracket</b> For Series 2, 10-pair profile rod installations with distance between rods of 95 mm		
With tabs for overvoltage protection	Depth: 35 mm	66192040-00
<b>Earthing clamp</b> For wire diameters up to 5 mm Mounts on profile rods. Includes screw and assembly instructions Quantity: 1		66192026-00