

## **Acessories - Test Cords**


The two-pole test cord features a 4 mm double socket and can be used for almost all LSA-PLUS systems, including NT modules, Series 2, Series 8 or Series 10 modules, as well as two- to eight-pole PCB modules. The cord is used whenever the module's existing test access is already occupied by another plug (such as changeover adapters and/or disconnection adapters) or when a module has no special test access. The spring test contacts connect directly to the wired LSA-PLUS contact. Clamping ribs within the LSA-PLUS contact slot ensure that test plugs are securely retained.



Description		Order No.
2-pole test cord	Length: 130 mm	60892141-00

## 2-pole test cords (for use with LSA-PLUS and LSA-PROFIL modules)


Description	Order No.
1 LSA-PLUS plug, (2) 4 mm banana plugs	
2.0 m	66242061-02
1 LSA-PLUS plug, (2) 4 mm banana sockets	
0.20 m	66242040-09
2.0 m	66242040-02

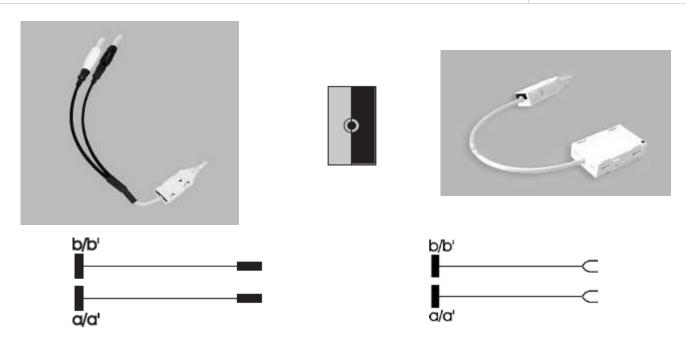



<u>2-pole test cords, 1 side access with disconnection function</u> (for use with LSA-PLUS and LSA-PROFIL disconnection modules)


Description	Order No.
1 LSA-PLUS plug, (2) 4 mm banana plugs	
2.0 m	66242521-02
1 LSA-PLUS plug and (2) 4 mm banana sockets	
0.20 m	66242320-09

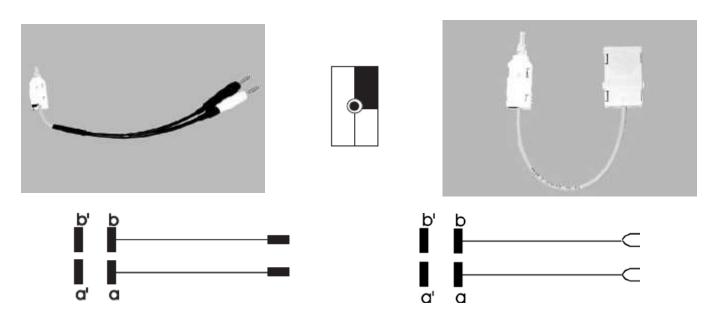

4-pole test cords with disconnection function (for use with LSA-PLUS and LSA-PROFIL disconnection modules)

Description	Order No.
1 LSA-PLUS plug and (4) 4 mm banana plugs	
2.0 m	66242541-02
1 LSA-PLUS plug, (4) 4 mm banana sockets	
0.20 m	66242340-09




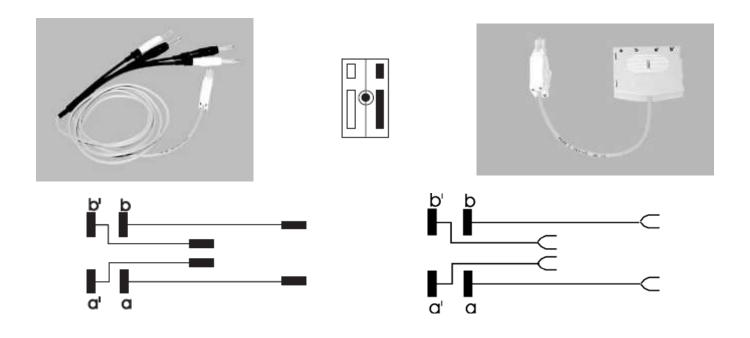

## **Accessories - Connection Cords**

<u>2-pole connection cord</u> (for parallel connections. Features (2) 2-pole plugs)

Description	Order No.
3.0 m	66242081-03

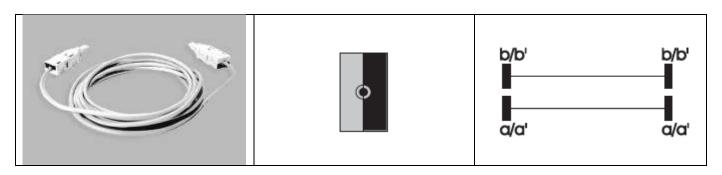


<u>3-pole connection cord with disconnection function</u> (for use with LSA-PLUS and LSA PROFIL disconnection 6- and 8-pair modules with shielding. Features (2) 3-pole plugs, with abc connected)

Description	Order No.
2.0 m	66262801-02












<u>6-pole connection cord with disconnection function</u> (for use with LSA-PLUS and LSA PROFIL disconnection 6- and 8-pair modules with shielding. Features (2) 6-pole plugs, with 1:1 wiring)

Description	Order No.
2.0 m	66262901-02







Description	Order No.
Disconnection adapter	
Opens jumpered line and accesses the line from one side	
1-pair	60892098-00
10-pair, printed 10	60892099-00
Changeover adapter	
For interruption-free changeover of wiring on connection and d	isconnection modules
1-pair	60892093-00
10-pair, printed 10	60892081-02