



HFTP

Customer premises wall outlet

The HFTP is a compact fiber wall outlet for use at the final fiber termination point in the customer premises.


The HFTP provides mechanical protection and managed fiber control in an attractive format suitable for use inside customer premises. A variety of possible fiber termination techniques are accommodated.


Features

- Splicing to factory terminated pigtails
- Positive fiber management
- Direct termination with field installable connectors
- Attractive design for indoor use
- Can hold up to 4 mechanical splices (RECORDsplice) and fusion splice protectors (SMOUV and ANT) and mechanical SC connectors can be integrated as well
- Splice cable to cable
- Compatible with 2 SC Simplex adaptors
- Multiple cable entry points (cable diameter ≤ 6mm)
- Can be wall mounted and mounted on wall boxes with fixation points of 60mm
- Laser safe with individual shutters




Dimensions





Ordering Information

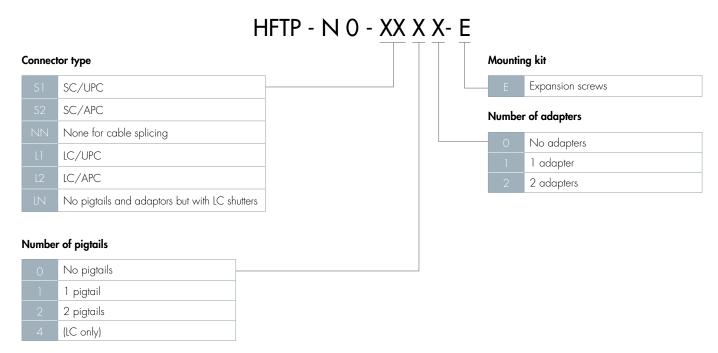

Accessories

CPWO-LABEL-(1000) Access screw cover and security label (MOQ/SPQ = 1000 pcs)

Note

HFTP-NO-NN00-E and HFTP-NO-LN00-E have an MOQ of 10 pcs All other items have an MOQ = SPQ = 300 pcs

Packaging: 10 pieces per box

For more technical options and order quantity information, please consult the products ordering guides or your local sales representative.



www.commscope.com

Visit our website or contact your local CommScope representative for more information.

© 2016 CommScope, Inc. All rights reserved.

SMOUV, RECORDsplice and all trademarks identified by @ or TM are registered trademarks or trademarks, respectively, of CommScope, Inc. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services.

PS-322810-EU (02/16) (Revised from tc-1061-ds)