


810009812/DB | L-144-LN-8F-M12YL/14D/GY/C



Single Jacket All-Dielectric, Gel-Free, Indoor Stranded Microsheath Tube cable. Provides Rodent Resistance.

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	L-LN


General Specifications

Cable Type	Stranded microsheath tube
Construction Type	Non-armored
Fiber Type, quantity	144
Fibers per Subunit, quantity	12
Jacket Color	Yellow
Jacket Marking	Meters
Subunit Type	Gel-free
Subunit, quantity	12
Total Fiber Count	144

Dimensions

Buffer Tube/Subunit Diameter	1.4 mm 0.055 in
Diameter Over Jacket	10.2 mm 0.402 in

Representative Image

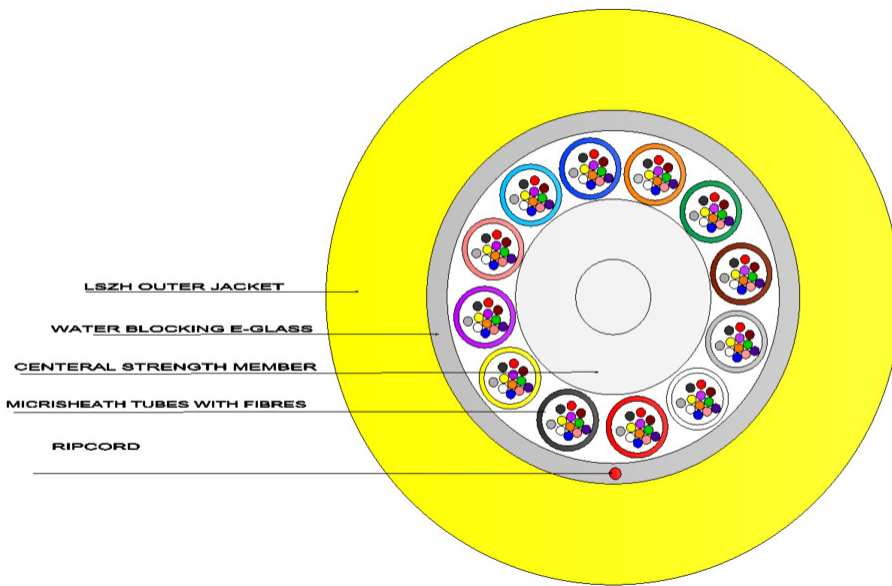

Material Specifications

Inner Jacket Material Low Smoke Zero Halogen (LSZH)

Mechanical Specifications

Minimum Bend Radius, loaded 200 mm | 7.874 in
Minimum Bend Radius, unloaded 150 mm | 5.906 in
Tensile Load, long term, maximum 1000 N | 224.809 lbf
Tensile Load, short term, maximum 1800 N | 404.656 lbf
Compression 10 N/mm | 57.101 lb/in
Compression Test Method FOTP-41 | IEC 60794-1 E3
Impact 2 N-m | 17.701 in lb
Impact Test Method FOTP-25 | IEC 60794-1 E4
Strain See long and short term tensile loads
Strain Test Method FOTP-33 | IEC 60794-1 E1
Vertical Rise, maximum 970 m | 3,182.415 ft

Optical Specifications

Fiber Type G.657.A1 | G.657.A1

Environmental Specifications

810009812/DB | L-144-LN-8F-M12YL/14D/GY/C

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	IEC 60794-1-2
EN50575 CPR Cable EuroClass Fire Performance	Cca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d0
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)

Environmental Test Specifications

Cable Freeze	-2 °C 28.4 °F
Cable Freeze Test Method	FOTP-98 IEC 60794-1 F15
Temperature Cycle	-10 °C to +60 °C (+14 °F to +140 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	111 kg/km 74.589 lb/kft
---------------------	---------------------------

Included Products

CS-8F-LT	–	Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber
----------	---	--

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable