CU1193-000 | BUDI-M-SP-B



BUDI Fiber Optic Wall mount Enclosure, empty for holding FIST Splice Trays, without lock

- · Compact, wall mountable fiber enclosures for indoor and outdoor use
- Specifically designed for fast FTTH deployment and easy customer connection
- Available with splicing (FIST) and/or patching and/or splitter combinations
- Multiple and modular cable port sealing options using gel technology

Product Classification

Brand FISTTM

Product Type Fiber wall box

Product Series BUDI
Regional Availability EMEA

General Specifications

Enclosure ColorGrayFunctionalitySplicingPackage, quantity1

Packaging Type Box | Carton

Splicing Capacity, maximum 216

Dimensions

 Depth
 175.00 mm | 6.89 in

 Height
 480.00 mm | 18.90 in


 Height, with cover
 550.00 mm | 21.65 in

 Width
 360.00 mm | 14.17 in

Dimension Drawing



CU1193-000 | BUDI-M-SP-B

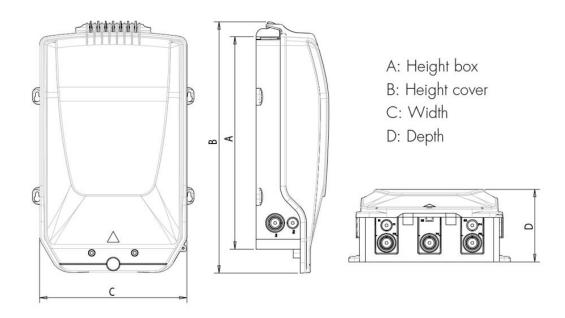

Dimension Drawing Used as an image placeholder

Mechanical Specifications

Access Front

Enclosure Material TypeLSZH thermoplasticFront Cover TypeSnap-on coverLock TypeKey lockMount TypeWall

Environmental Specifications

Environmental Space Outdoor

Qualification Standard IEC 60529, IP54 | IEC 61753-1, category G

Regulatory Compliance/Certifications

AgencyClassificationRoHS 2011/65/EUCompliant



page 2 of 2 January 20, 2020



CY3250-000 | BUDI-M-TA-A



BUDI Fiber Optic Wall mount Enclosure, empty for holding FIST Splice Trays and Fiber Optic Adapters, no lock

- Compact, wall mountable fiber enclosures for indoor and outdoor use
- Specifically designed for fast FTTH deployment and easy customer connection
- Available with splicing (FIST) and/or patching and/or splitter combinations
- Multiple and modular cable port sealing options using gel technology

Product Classification

Brand FIST™

Product Type Fiber wall box

Product SeriesBUDIRegional AvailabilityEMEA

General Specifications

Enclosure Color Gray

Functionality Patching | Splicing

Package, quantity

Packaging Type Box | Carton

Splicing Capacity, maximum 144

Dimensions

 Depth
 175.00 mm | 6.89 in


 Height
 480.00 mm | 18.90 in

 Height, with cover
 550.00 mm | 21.65 in

 Width
 360.00 mm | 14.17 in

Dimension Drawing



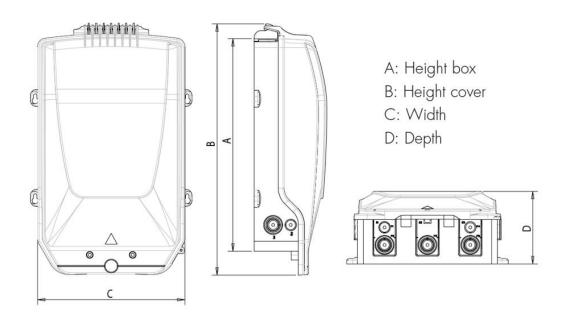

Dimension Drawing Used as an image placeholder

Mechanical Specifications

Access Front

Enclosure Material Type LSZH thermoplastic **Front Cover Type** Snap-on cover

Mount Type Wall

Environmental Specifications

Environmental Space Outdoor

Qualification Standard IEC 60529, IP54 | IEC 61753-1, category G

Regulatory Compliance/Certifications

AgencyClassificationRoHS 2011/65/EUCompliant



